

# EASY ASSEMBLY AND OPERATION INSTRUCTIONS

124278 Angel of Death



This item, when assembled by the following instructions, should take 15 minutes to assemble.  
Please follow the step by step guide and enjoy your Angel of Death!

## CARE AND STORAGE INSTRUCTIONS

For best performance operate your item indoors or in a sheltered outdoor area. We also recommend that you bring your item indoors during adverse weather (extreme cold, strong winds and/or rain). When not in use, store this product in it's original packaging. Keep away from heat and moisture.

## WARNING

This item is not a toy and should be used for decoration only. This item contains small parts that can be a choking hazard. Keep all plastic and wire parts away from children. This product is intended for people ages 14 and up.


Please read all instructions carefully before assembling. Save this instruction sheet for future reference.

## PARTS LIST


- A. Base
- B. Lower Support Poles (x4)
- C. Upper Support Poles (x2)
- D. Torso Frame
- E. Step Here Pad
- F. Chest Piece
- G. Shoulder Frame
- H. Head
- I. Hip Ring
- J. Costume
- K. Gauze Vest
- L. Right Arm
- M. Left Arm
- N. Right Hand
- O. Left Hand
- P. Neck Cover
- Q. Left Wing
- R. Right Wing
- S. Belt
- T. Chains with Bones

UL Adapter \*

\* UL Power Adapter Spec  
Input: 100 - 240VAC 50/60Hz  
Output: 6.0V 1A

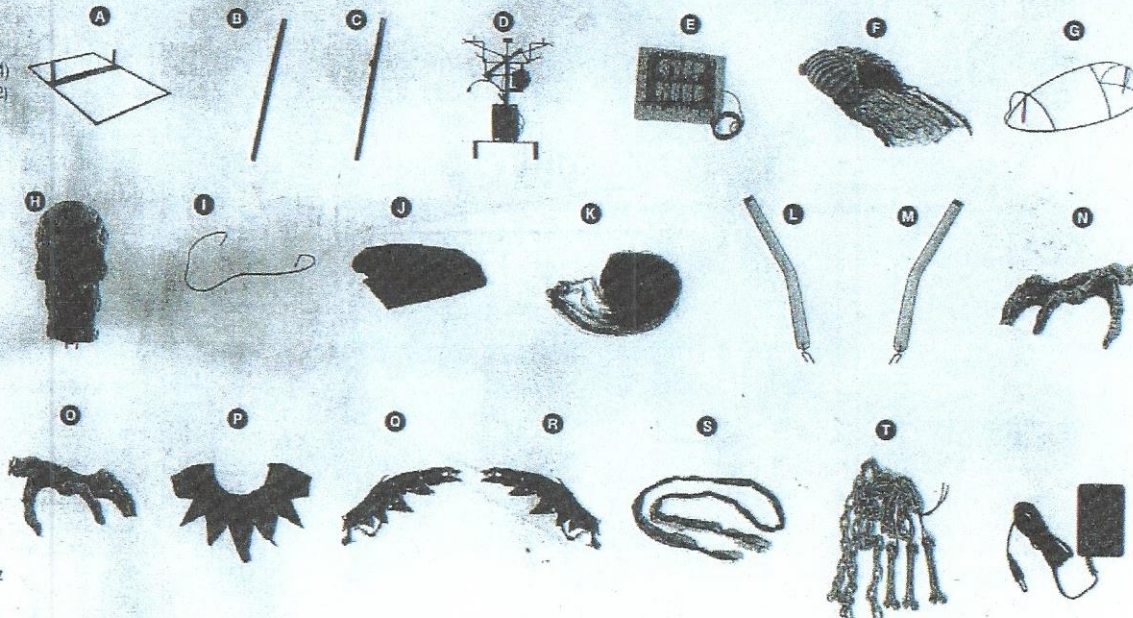


BEFORE ASSEMBLING. REMOVE ALL THE ABOVE PARTS FROM BOX. IF ANY PART IS MISSING. DO NOT ATTEMPT TO ASSEMBLE THE PRODUCT AND CONTACT CUSTOMER

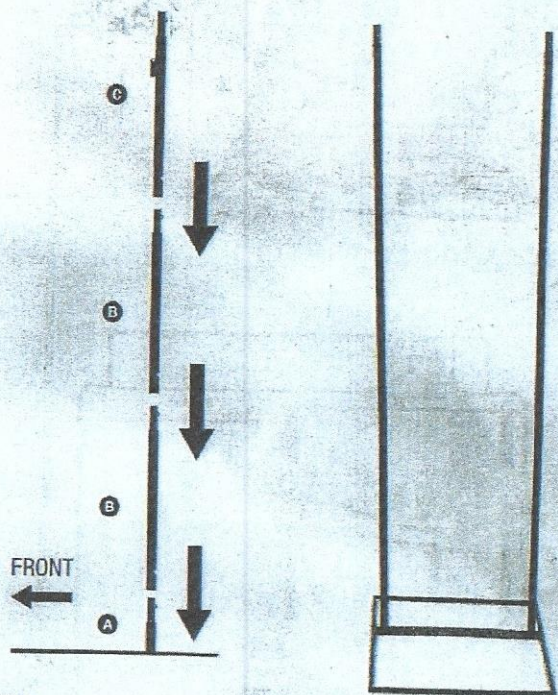

### STEP 1

Set the (A) Base with the longer end towards the front.

Now Assemble (B) Lower Support Poles to (A) Base and secure by aligning the quick-connect push buttons into the pre-drilled holes. Next, assemble the (C) Upper Support Poles into the tops of the (B) Lower Support Poles by aligning the quick-connect push buttons into the pre-drilled hole. Be sure that the slot housings face on the (C) Upper Support Poles face forward.

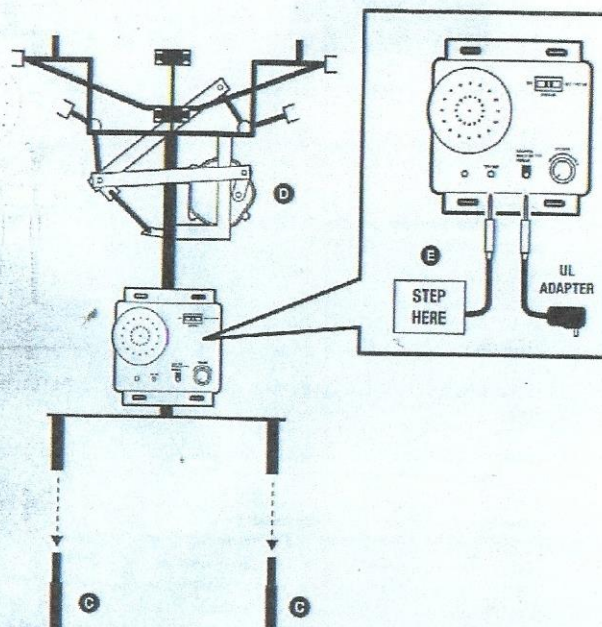


### STEP 2

Next place (D) Torso Frame onto the tops of (C) Upper Support Poles as shown and secure by aligning the quick-connect push buttons into the pre-drilled hole. Note: the Speaker should be facing towards the front. Now, plug the UL Power Adapter into the input receiving jack marked "DC 6V" on the Function Control box and route the power cord down towards the bottom of the frame.

Note: Do not plug UL Power Adapter into power outlet until item assembly is completed.


OPTIONAL: If you choose to use the (E) Step Here Try-Me Activation Pad, plug the connector into the input receiving jack marked "TRY ME" on the Function Control box and route the (E) Step Here Pad down and out the bottom, then set the Step Here Pad in front of the character.



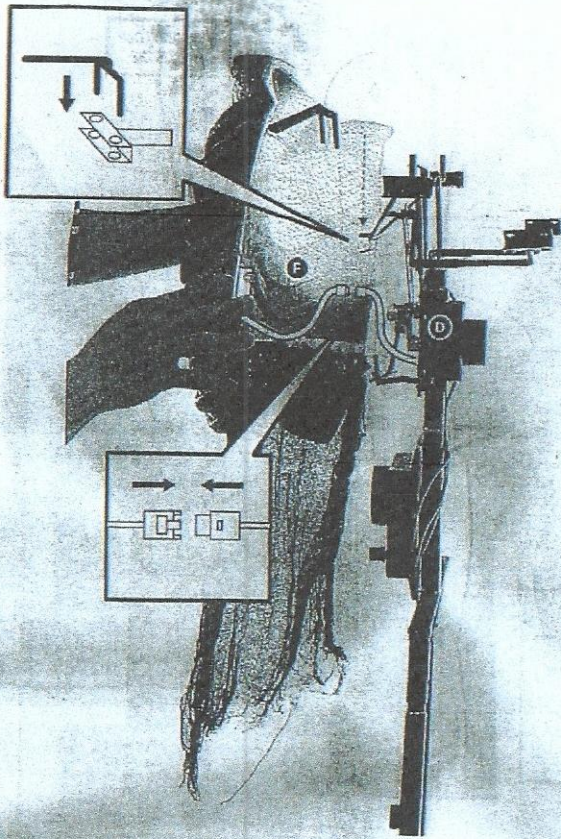


#### STEP 3

Now place the (F) Chest Piece onto the (D) Torso Frame by sliding the forked-hook into the front slot housing on the (D) Torso Frame and connect the IR Sensor cable from the (F) Chest Piece to the coordinating cable on the (D) Torso Frame.

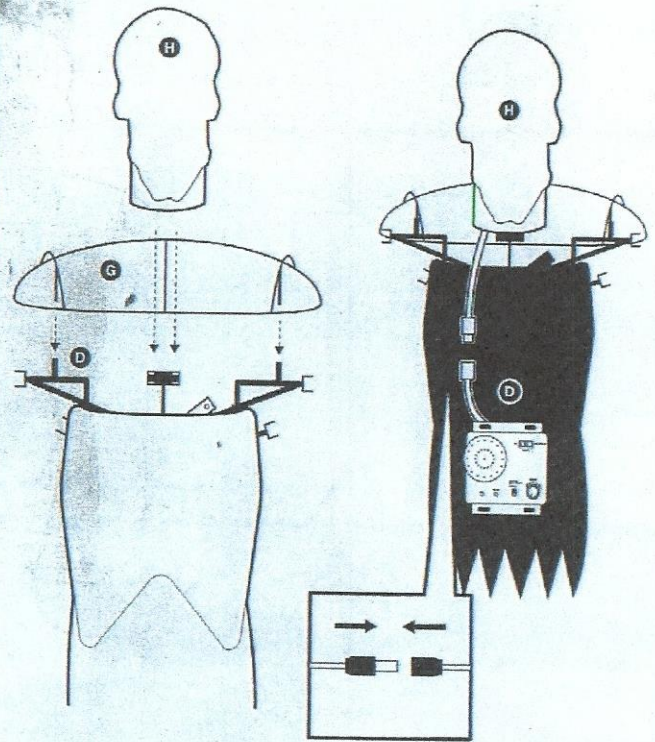

#### STEP 4


Place the (G) Shoulder Frame onto the (D) Torso Frame as shown, then place the (H) Head in to the (D) Torso Frame by sliding the forked-hook into "neck" slot housing on the (D) Torso Frame then attach the cable from the (H) Head to the power box as shown.

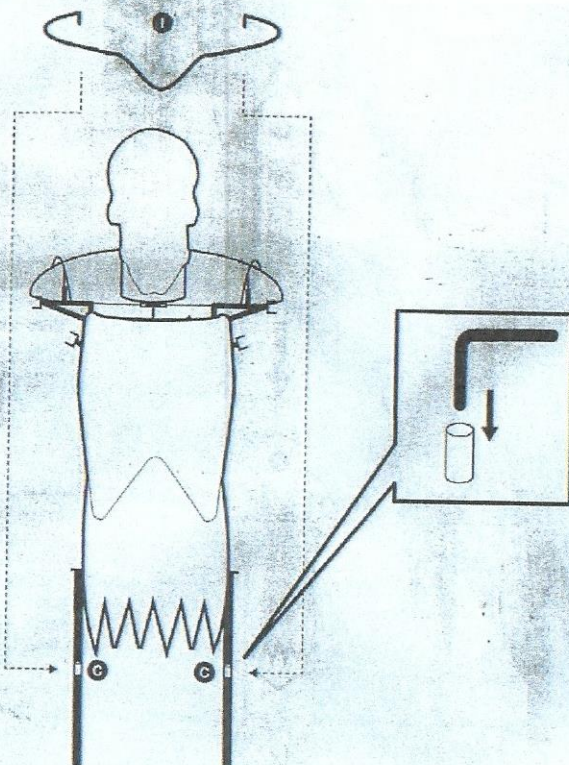

#### STEP 5

Now connect the (I) Hip Ring into the slot housings on the (C) Upper Support Poles.


NOTE: The pegs on either side of the Hip Ring are different sizes and can only be assembled onto the (C) Upper Support Poles one way.

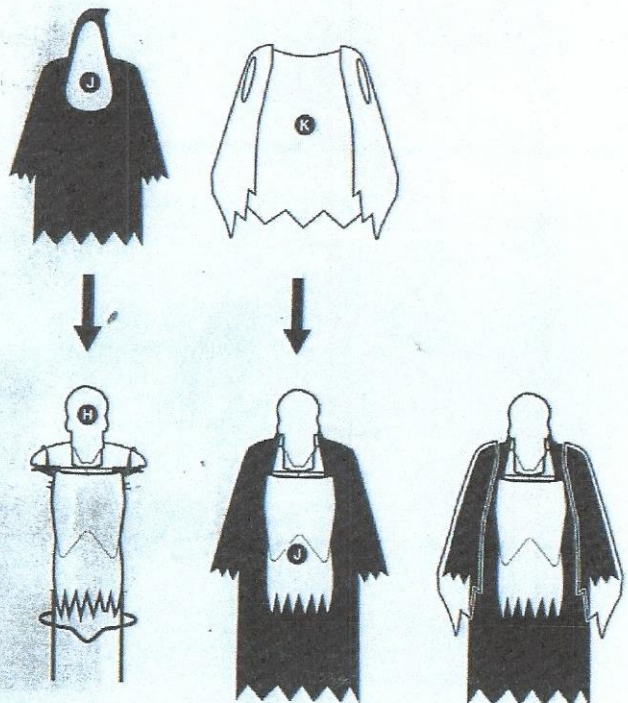

#### STEP 6


Lower the (J) Costume over the (H) Head. The (J) Costume opens and closes at the back and the "torn chest" section is at the front. Now place (K) Gauze Vest over the (J) Costume by sliding the sleeves through the holes in the (K) Gauze Vest as shown.



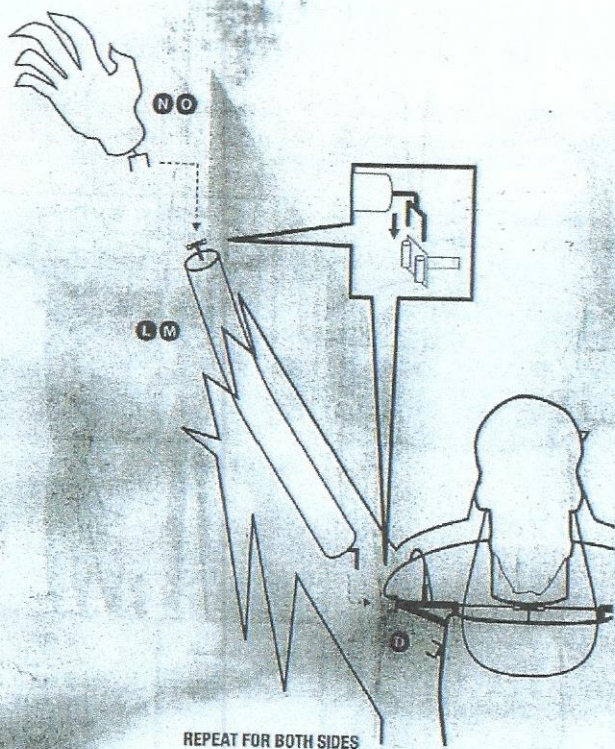


#### STEP 7

Now slide the (L) Right Arm up through the right sleeve and slide the forked-hook into the right "shoulder" slot housing on the (D) Torso Frame. Slide the (M) Left Arm up through the left sleeve and slide the forked-hook into the left "shoulder" slot housing on the (D) Torso Frame. Set the (N) Right Hand into place by sliding the forked-hook into the "wrist" slot housing on the end of the (L) Right Arm. Set the (O) Left Hand into place by sliding the forked-hook into the "wrist" slot housing on the end of the (M) Left Arm.

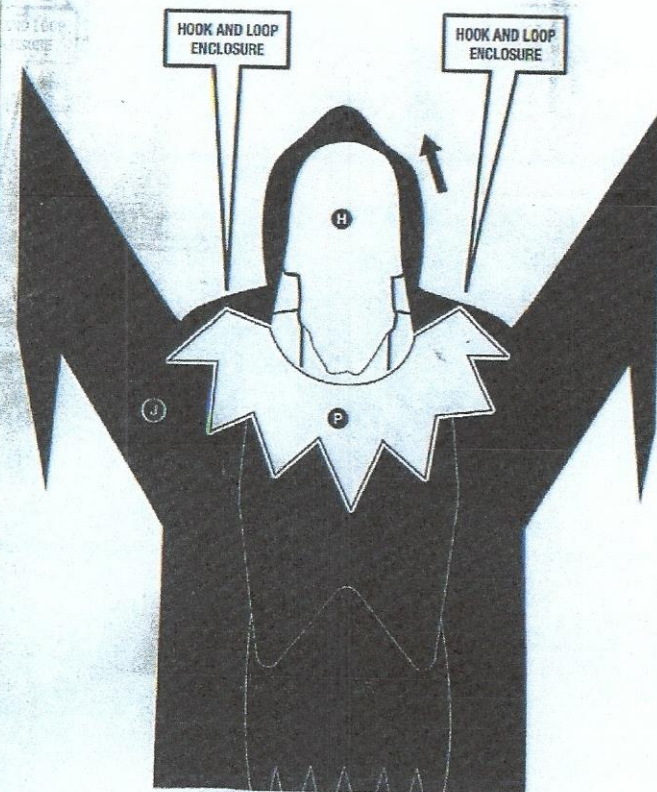

#### STEP 8

Pull the hood up onto the (H) Head and secure in place with the hook and loop closure and then secure the (P) Neck Cover to the inside of the (J) Costume with the hook and loop closures at the sides as shown.

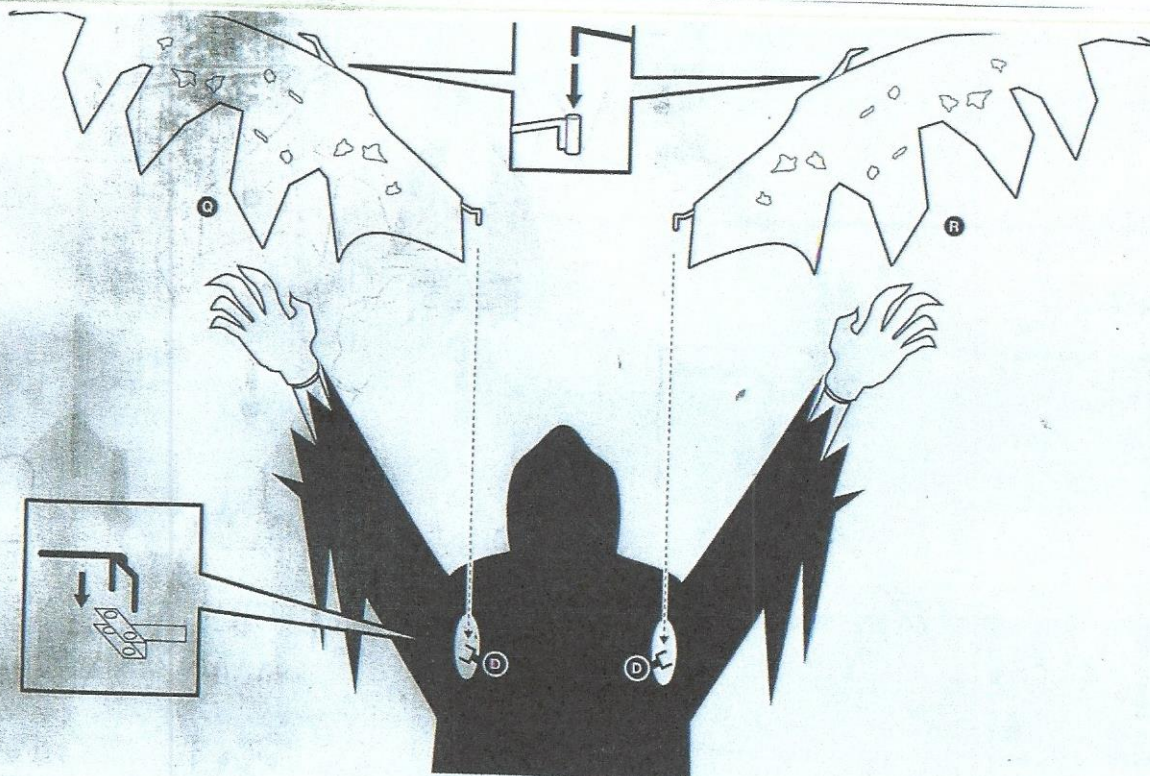

#### STEP 9

Now take the (Q) (R) Wings and unfold and connect the slot housing at the hinge and secure with hook and loop closures as shown. Slide the (R) Right Wing into forked-hook into the slot housing on the back of the (D) Torso Frame. Slide the (Q) Left Wing into forked-hook into the slot housing on the back of the (D) Torso Frame. Note: there are pre-cut holes in the back of the costume that expose the slot housings.





#### STEP 10

Tie (S) Belt around the waist and add the (T) Chain with Bones detail to the front of the (J) Costume above the (I) Hip Ring for best results.

### OPERATION INSTRUCTIONS

1. Plug the UL Power Adapter into a standard power outlet and adjust the settings on the Function Control Box to your liking.
2. The Angel of Death has 3 operation settings which can be found on the main Function Control Box on the (D) Torso Frame:
  - On: This setting allows the item to run continuously.
  - Sensor: This setting allows the item to only be activated when the Infra-red sensor is activated. The item will operate for one audio-cycle with each sensor activation.
    - The Infra-red (IR) sensor will activate when someone comes within an 80-degree angle from left-to-right, as well as from above and below.
    - The Infra-red (IR) sensor has a range of up to 2 meters/6.56 feet, and can work in all lighting conditions - bright light to no-light!
  - Off/Try-Me: This setting allows the item to be activated only if the Try-Me is triggered. The item will operate for one audio-cycle with each Try-Me activation.

The Function Control box also includes a Volume Control knob, which allows you to adjust the volume to be as loud or as quiet as needed. Be sure to test the item before finalizing your display so you can set the volume to your liking.

ENJOY YOUR ANGEL OF DEATH!

