



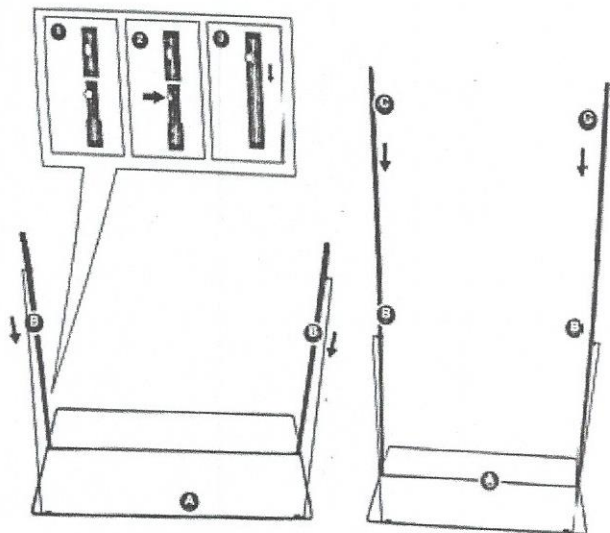

STEP 1

NOTE: The longer end of the (A) Base goes towards the front, and the slot housings on the (B) Lower Support Poles are facing out. First, set the cross-braces located on the (B) Lower Support Poles into the slot housings on the (A) Base as shown, and secure the (B) Lower Support Poles to the (A) Base by aligning the quick-connect push buttons into the pre-drilled holes. Now assemble the (C) Upper Support Poles to the (B) Lower Support Poles as shown, and secure by aligning the quick-connect push buttons into the pre-drilled holes.

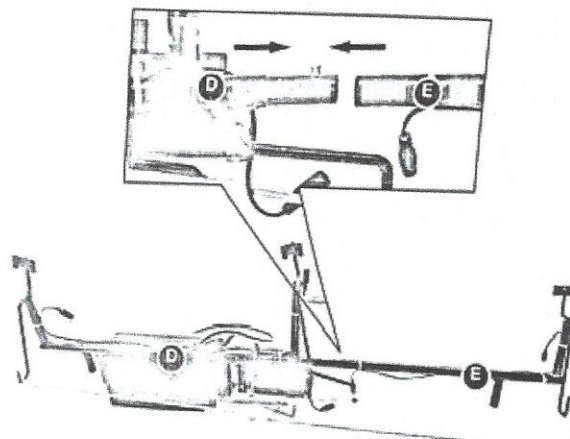

STEP 2

Assemble the (D) Torso Support Frame to the (E) Right Torso Support Frame as shown, and secure by aligning the quick-connect push buttons into the pre-drilled holes.

1/3

PROCEED TO PAGE 2 >>

EASY ASSEMBLY AND OPERATION INSTRUCTIONS

5127031 Haunting Ghost Trio

This item, when assembled by the following instructions, should take 15 minutes to assemble. Please follow the step by step guide and enjoy your Haunting Ghost Trio!

CARE AND STORAGE INSTRUCTIONS

For best performance operate your item indoors or in a sheltered outdoor area. We also recommend that you bring your item indoors during adverse weather (extreme cold, strong winds and/or rain). When not in use, store this product in its original packaging. Keep away from heat and moisture.

WARNING


This item is not a toy and should be used for decoration only. This item contains small parts that can be a choking hazard. Keep all plastic and wire parts away from children. This product is intended for people ages 14 and up.

1. Please use the applicable transformer or the one supplied by manufacturer.
2. Please install the product according to the instruction, the connecting wire should be connected in the correct color.
3. Children should be supervised by adults when using the product and keep the transformer away from kids.
4. The transformer should be inspected regularly.

Please read all instructions carefully before assembling. Save this instruction sheet for future reference


PARTS LIST

- A. Base
- B. Lower Support Poles x 2
- C. Upper Support Poles x 2
- D. Torso Support Frame
- E. Right Torso Support Frame
- F. Left Ghost Torso
- G. Left Ghost Costume
- H. Left Ghost Head
- I. Center Ghost Torso
- J. Center Ghost Costume
- K. Center Ghost Head
- L. Right Ghost Torso
- M. Right Ghost Costume
- N. Right Ghost Head
- O. Back Curtain
- P. Sensor
- Q. Step Here Activation Pad

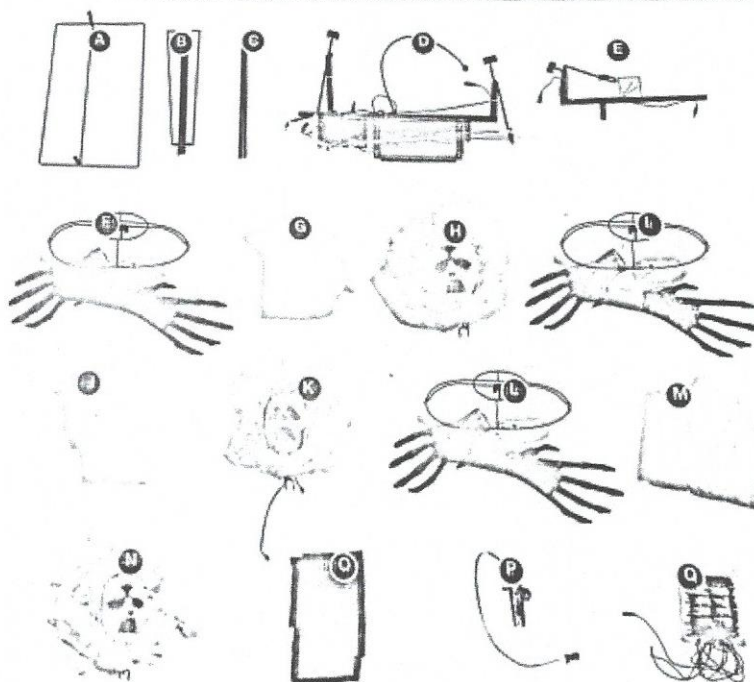


UL Adapter *

* UL Power Adapter Spec
Input: 100 - 240VAC 50/60Hz
Output: 5.9V 1A

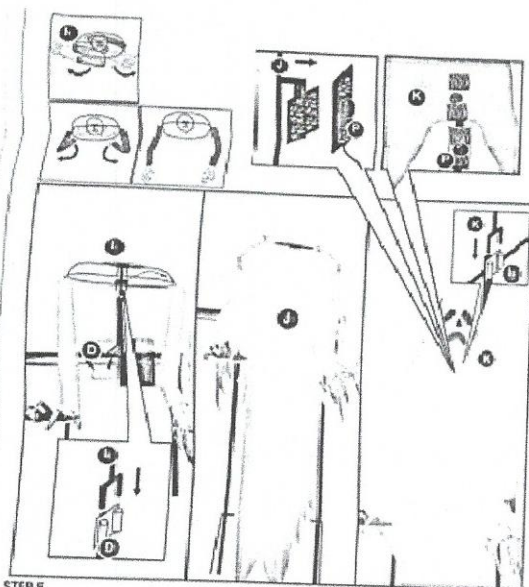

STEP 5

Unfold the arms of the (J) Center Ghost Torso as shown and set the forked-hook on the underside of the torso into the slot housing found on the middle side of the (D) Torso Support Frame as shown. Lower the (J) Center Ghost Costume over the (J) Center Ghost Torso so that the costume opens/closes at the back. Now set the (K) Center Ghost Head into place by inserting the forked-hook into the "neck" slot housing on the (J) Center Ghost Torso. Attach the (P) Sensor on the pole of the (K) Center Ghost Head by the hook & loop closures as shown, and then secure the (P) Sensor on the hood of the (K) Center Ghost Head inside hood as shown.

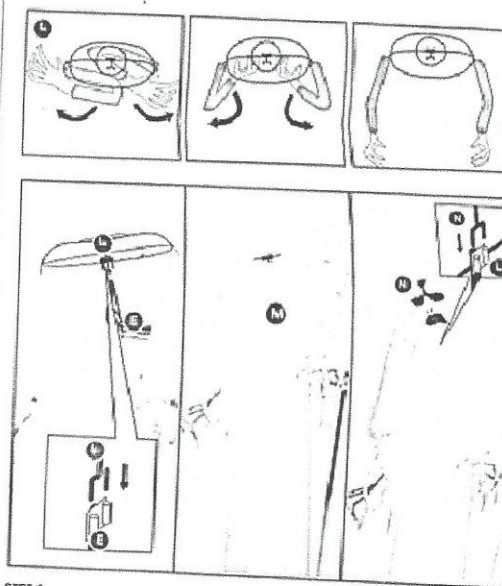


STEP 6

Unfold the arms of the (L) Right Ghost Torso as shown and set the forked-hook on the underside of the torso into the slot housing found on the left side of the (E) Right Torso Support Frame as shown. Lower the (L) Right Ghost Costume over the (L) Right Ghost Torso so that the costume opens/closes at the back. Now set the (H) Right Ghost Head into place by inserting the forked-hook into the "neck" slot housing on the (L) Right Ghost Torso.

2/3

PROCEED TO PAGE 3 >>

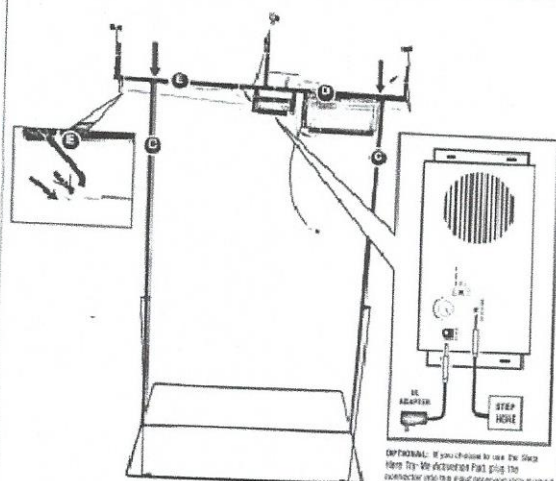


STEP 3

NOTE: The speaker on the Function Control Box located on the (D) Torso Support Frame should be facing front. Assemble the combined (D, E) Torso Support Frame onto the (C) Upper Support Poles as shown, and secure by aligning the quick-connect push buttons into the pre-drilled holes.

NOTE: Cotter Pins are located in the plastic bag attached to the (E) Right Torso Support Frame. Locate the loose cross bar on the back-side of the (D) Torso Support Frame and attach to the end of the rotating shaft of the (E) Right Torso Support Frame and secure with the Cotter Pin supplied. Now, plug the UL Power Adapter into the input "receiving jack marked "DC 5.9V" on the Function Control Box.

OPTIONAL: If you choose to use the Star Wars Toy-We-Activation Pad, plug the connector into the input/receiving jack marked "Toy We-Act" on the Function Control Box and wait the Step-Hero pad in front of the actor when ready to display.

Note: Do not plug the UL Power Adapter into power outlets until the system is completed.

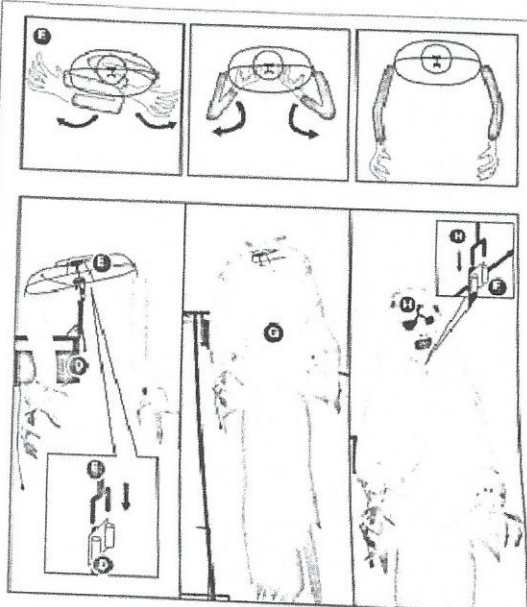

STEP 4

Unfold the arms of the (F) Left Ghost Torso as shown and set the forked-hook on the underside of the torso into the slot housing found on the left side of the (D) Torso Support Frame as shown. Lower the (G) Left Ghost Costume over the (F) Left Ghost Torso so that the costume opens/closes at the back. Now set the (H) Left Ghost Head into place by inserting the forked-hook into the "neck" slot housing on the (F) Left Ghost Torso.

OPERATION INSTRUCTIONS:

1. Plug the UL power adapter into a standard power outlet and adjust the settings on the Function Control Box located on the (D) Torso Support Frame, as desired.

2. Settings:

Sensor: This switch mode will activate lights, sound, and animation when the Infra-red (IR) sensor is activated and will operate for 1 audio-cycle with each activation. The Infra-red (IR) sensor has a range of up to 2 m/6.5 ft. and will activate when someone comes within an 80-degree angle from left-to-right, as well as from above and below.

/OFF/Try Me: This switch mode allows the item to be activated only if triggered by using a Step Here Try Me Activation Pad. The item will operate for one audio cycle with each Try-Me activation. Refer to Assembly Instructions Step 3 for further details.



I / ON : This switch mode will continually operate the lights, sound, and animation of the item.



: Raise or lower the volume using the volume control turn dial, turn and click all the way down to turn the volume off.


CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or experienced radio/TV technician for help.

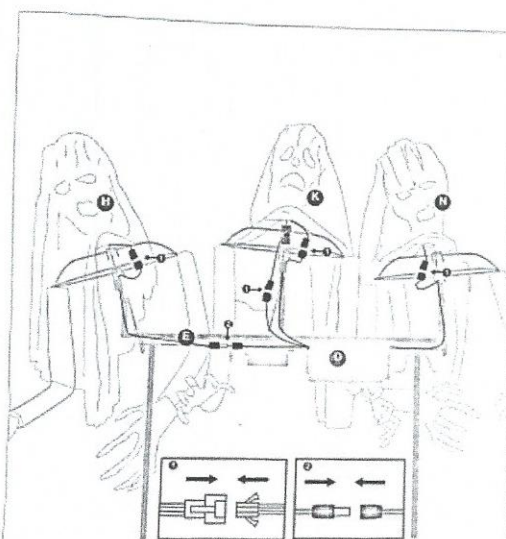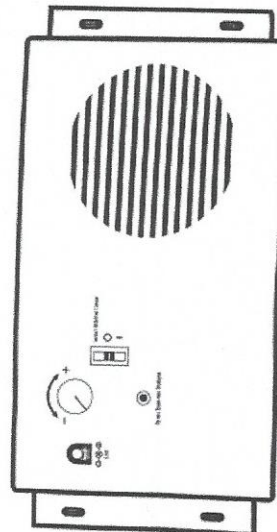

STEP 7

Connect the pin-connection cables from all three Heads and the Sensor to the coordinating cables on the assembled Torso Support Frame as shown at "point 1" above. Connect the color-coordinated cable from the Right Ghost to the coordinating cable coming from the Function Control Box on the Torso Support Frame as shown at "point 2" above.

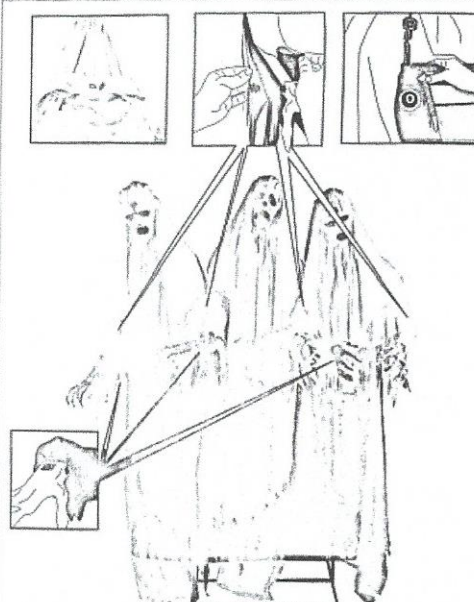

STEP 8

Attach the (D) Black Curtain between the assembled Ghosts and the assembled frame by securing the hook & loop closures as shown. Locate the hook & loop closures at the inside of all sleeves and secure to the wrists as shown. Secure the back of three Ghosts Costume with hook and loop closures as shown.